



Bed Head DIY Instructions

Thank you for purchasing a Pressed Tin Panels Bed Head DIY pack!

Your pack will contain 10 items; panel of your choice, one full length under/over border, two half-length under/over borders, 1 full length Cornice Mounting Strips, 2 smaller lengths of Cornice Mounting Strip, and two corner rosettes, small pack of 20 nails.

You will also require; a sheet of Ply wood or MDF cut to desired size, MDF timber lengths cut to required size or your choice of wall mounting options, Marking pen, 1 tube of Liquid nails, tin snips, wooden moulding tools, hammer, drill and suitable screws.




Ply or MDF board needs to be cut to the desired size.

ie; width of panel plus the width of both borders.

Length of MDF needs to be cut to desired length to create legs, these then need to be screwed and glued into place at around one quarter in from each end.

Commence laying the Cornice mounting strips around the edge of the base board with the rolled edge running around the outside, glue and nail/staple in place, this then helps to hold the Border in place. Begin laying the Borders around along the inside of the mounting strips with the flat 'under' edge towards the centre of the base board, the full length border at the top and the two half lengths at each side as pictured below left. Place Corner Rosette into position at each corner joint, again slipping the outer edges underneath the mounting strip. Once you are happy with the positioning of the rosette and borders the border can be glued and nailed into place. The Rosette then needs nailing on the inside corner which will then be covered by the main panel, repeat for opposite corner.

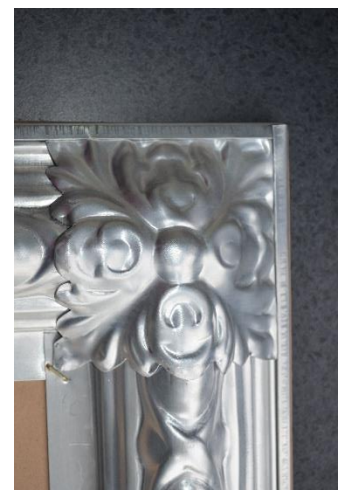





Once Mounting strips, borders and Rosettes are securely in place 'check measure' the space for the centre panel, trim panel, corners etc if necessary.

Apply Liquid Nails to base board generously, making sure not to go too close to the edge of the border to avoid any excess glue seeping through

Place your trimmed panel onto the prepared base board, making sure it is level as you go. Apply pressure across the entire panel with anything handy, as pictured on the right, as the glue dries.

Your Pressed Tin Panels Bed Head is now complete, a clear sealer can be applied or a coat of primer and your choice of paint effect may also be applied.

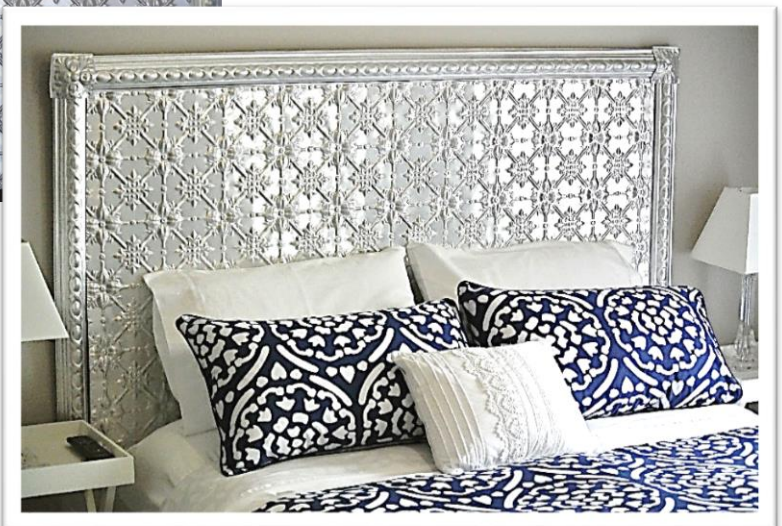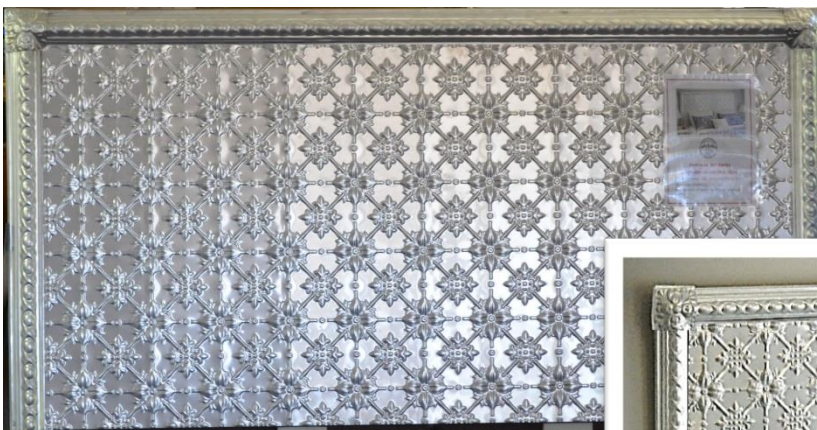

Installation instructions are a guide only, all care and no responsibility will be undertaken by Pressed Tin Panels for incorrect assembly of the bed head. If further assistance is required please phone 02 6332 1738.